

2


Series

- Stainless Steel Top Plate Swivel & Rigid
- Capacity up to 325 lbs each



www.colsoncaster.com

Standard Dimensions

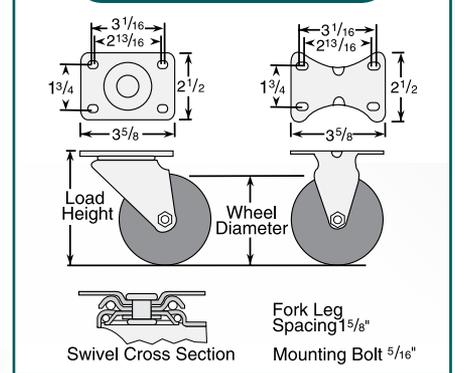

Standard Features

- Polished 304 grade stainless steel finish handles the most punishing, corrosive conditions
- Double ball raceways for better performance and greater durability
- All component parts, including spanner bushing, axle and nut are stainless steel
- Designed to perform in the most hostile environments
- If rust is a problem... Colson stainless steel is the solution

Colson 2 Series Casters • Stainless Steel Top Plate Swivel & Rigid • Capacity to 325 lbs

Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Swivel Top Plate Caster Models	Rigid Top Plate Caster Models	Load Height	Swivel Radius	Weight (Pounds)
3"	1 1/4"	150	Rubber HI-TECH	Plain	2.33456.42	2.33408.42	4 1/8	3 1/8	1 5/8
		200	Polyolefin	Delrin	2.33456.544	2.33408.544	4 1/8	3 1/8	1 5/8
			Polyurethane HI-TECH	Plain	2.33456.944	2.33408.944	4 1/8	3 1/8	1 5/8
3 1/2"	1 1/4"	250	Polyolefin	Delrin	2.03456.544	2.03408.544	4 1/16	3 3/8	1 5/8
			Polyurethane HI-TECH	Delrin	2.03456.944	2.03408.944	4 1/16	3 3/8	1 7/8
		300	Perma Rubber (Flat)	Delrin	2.03456.444	2.03408.444	4 1/16	3 3/8	1 3/4
			Thermo	Plain	2.03456.52 HT	2.03408.52 HT	4 1/16	3 3/8	1 5/8
	1 5/16"	210	Perma Rubber (Round)	Delrin	2.03456.564	2.03408.564	4 1/16	3 3/8	1 3/4
4"	1 1/4"	250	ThermoTech	Teflon	2.04456.613 H	2.04408.613 H	5 1/8	3 5/16	3
			Polyolefin	Delrin	2.04456.544	2.04408.544	5 1/8	3 5/16	2 1/8
		275	Polyurethane HI-TECH	Delrin	2.04456.944	2.04408.944	5 1/8	3 5/16	2 1/8
			Perma Rubber (Flat)	Delrin	2.04456.444	2.04408.444	5 1/8	3 5/16	2 1/4
			Thermo	Plain	2.04456.52 HT	2.04408.52 HT	5 1/8	3 5/16	2 1/4
5"	1 1/4"	250	ThermoTech	Teflon	2.05456.613 H	2.05408.613 H	6 3/16	4 1/16	3
			Polyolefin	Delrin	2.05456.544	2.05408.544	6 3/16	4 1/16	2 5/8
		300	Polyurethane HI-TECH	Delrin	2.05456.944	2.05408.944	6 3/16	4 1/16	2 5/8
			Perma Rubber (Flat)	Delrin	2.05456.444	2.05408.444	6 3/16	4 1/16	2 3/4
			Thermo	Plain	2.05456.52 HT	2.05408.52 HT	6 3/16	4 1/16	2 3/4
	1 5/16"	250	Perma Rubber (Round)	Delrin	2.05456.564	2.05408.564	6 3/16	4 1/16	2 3/4

Hollow King Pin: For hollow king pin on swivel casters only, change 6th digit to "0" (Example: 2.04450.613 H). Consult factory for 6" sizes.

Caster Brake



Top Lock
(See page 15) Available on all 3" swivel models. Not recommended for high-temp applications. Field installable (Specify **BRK1**).



Tech Lock
(See page 15) Available on 4" and 5" swivel models. Field installable (Specify **BRK2**).



Total Lock
(See page 15) Riveted design is not field installable. Locks wheel and swivel. Available on all swivel models (Specify **BRK4**).

Wheel Selection



Fork Option



NSF Listed
(See page 3) Available on all models (Specify **FSI**).